



# BRAVO<sup>®</sup> 5

## Ceiling-Mount 360° PIR Motion Detector

Where office partitions and room furniture offer convenient hiding places, ordinary wall-mounted detectors are at a disadvantage. Not so with the Bravo5 PIR. From its vantage point high up on the ceiling, it sees where other detectors can't. And where street access offers easy entry points, Bravo5 offers an optional glassbreak detector, for double the protection.

### MODELS...Motion Alone

BV-500	Form 'A' alarm contact
BV-501	Form 'A' alarm contact & tamper switch
BV-502	Form 'C' alarm contact & tamper switch

### MODELS...Motion & Glassbreak

BV-500GB	Form 'A' alarm contact (motion), form 'C' contact (glassbreak)
BV-501GB	Form 'A' alarm contact (motion), form 'C' contact (glassbreak) & tamper switch
BV-502GB	Form 'C' alarm contact (motion), form 'C' contact (glassbreak) & tamper switch

### 360° PIR DETECTOR RANGE


Mounting height	8' (2.4m)	10' (3.0m)	12' (3.6m)
Detection diameter at floor	24' (7.3m)	30' (9.2m)	40' (12.2m)

### 360° GLASSBREAK DETECTOR RANGE


Glass Type & Thickness	Sizes	Maximum 'D' Detection Range	
		Level 1 †	Level 2 †
<b>Plate/Tempered</b> 1/8" - 1/4" thick (3 - 6 mm)	18" x 18" and up (46 x 46 cm)	25' (7.6m)	15' (4.6m)
	12" x 12" to 18" x 18" (30 x 30 to 46 x 46 cm)	15' (4.6m)	10' (3m)
<b>Wired/Laminated</b> 1/4" thick (6 mm)	18" x 18" and up (46 x 46 cm)	20' (6m)	DO NOT
	12" x 12" to 18" x 18" (30 x 30 to 46 x 46 cm)	10' (3m)	USE

†Jumper selectable

### 360° QUAD Element PIR...at 8' (2.4m) height

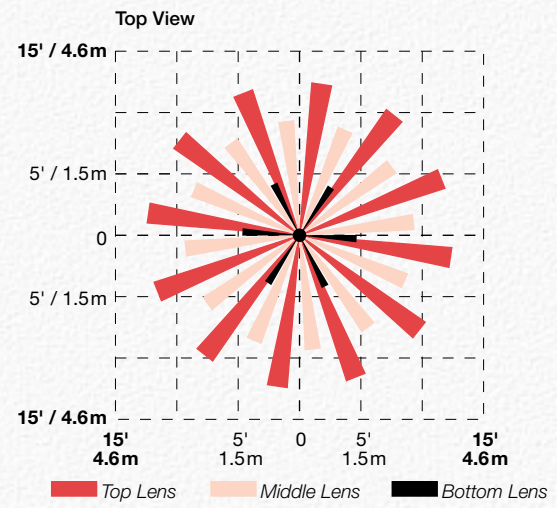

### Side View

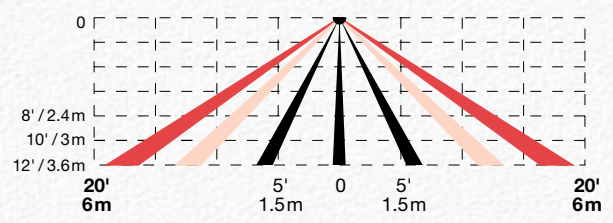

### 360° Glassbreak Detector

